


# FLAT DROP 1/2-24 FIBER DRY LOOSE TUBE 7MM

## Cable Description

FTH Flat Drop with 2 FRP, the optical fiber unit is positioned in the Loose tube. Two parallel strength member are placed at the two sides of the loose tube for protection outside sheath is PE.

## Cable Drawing

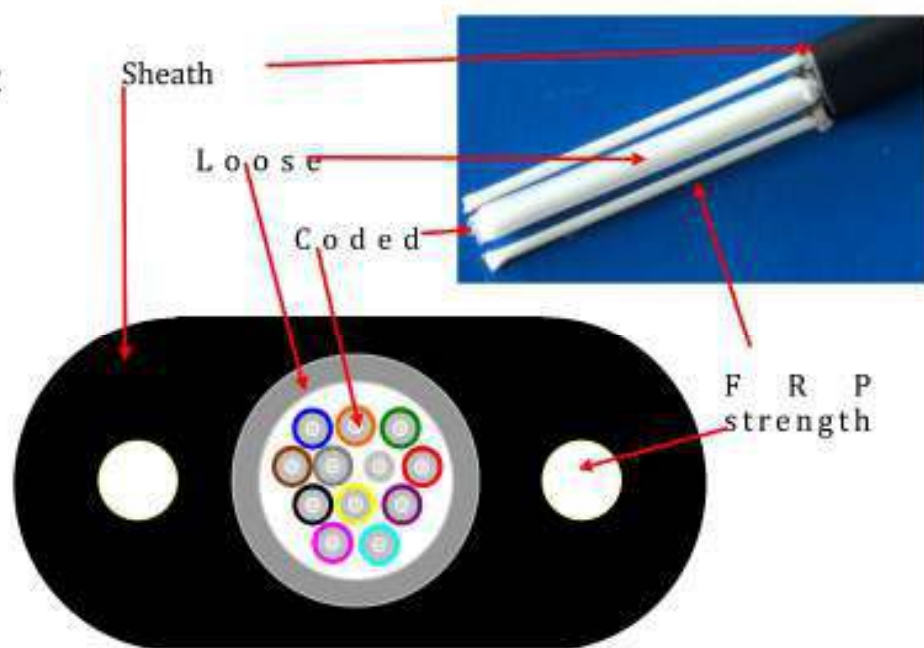

## Application

1. Suitable for aerial and duct drop installation
2. Long distance and local area network communication.

## Characteristics

1. Good mechanical and environment characteristic
2. Anti-UV characteristic meet the requirements of relevant standards
3. The mechanical characteristic meet the requirements of relevant standards
4. Big capacity data transmission
5. Meet various requirements of market and clients